

Project Profile Barbican Landing Stage, Plymouth


Duration: 5 days Value: £65,000



Client: Cattewater Harbour Commissioners

Requirement:

The pontoons at the Barbican Landing Stage are well used by local ferries and larger vessels to collect and disembark up to 200 passengers at a time. Cattewater Harbour Commissioners were awarded £150,000 of Government funding via the Marine Management Organisation's (MMO) Fisheries and Seafood Scheme (FaSS). This grant allowed an extension to the landing stage by installating new pontoons, which provided over 60 metres of additional mooring space.

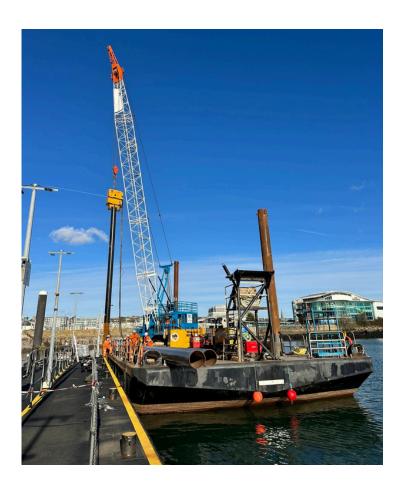

Solution:

TMS's involvement in the project was to install 3 piles measuring 508 mm in diameter and 24m long. This installation took place using our inhouse crane barge TMS Maverick. Once the piles were set out in the correct position, they were driven to design toe level with a vibrating piling hammer.

The installation of the additional pontoons, equipped with shore power and mains water, provides a dedicated area for drop-off and pick-up points for a variety of recreational fishing vessels, including wildlife safaris, dual coded vessels, and angling vessels. It will also act as a haven for commercial fishers who can use it for safe mooring.